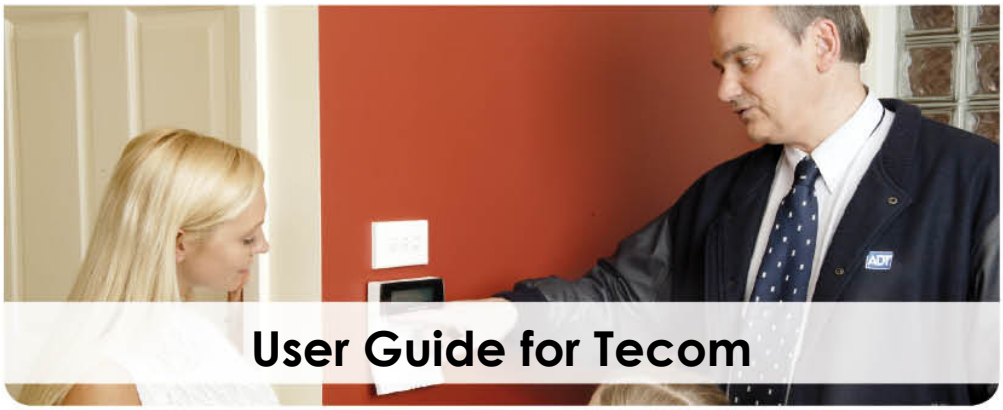

User Guide for Tecom

ARMING THE SYSTEM

(Press Clear At Start & Then At End)

- To arm the system, you must specify that you are leaving an area by using the [ON] key.
- To arm all areas Enter user code,
- Press [ON] key.
- This will arm the whole system

TO ARM SINGLE AREAS

- Enter user code
- And select area number and press ENTER key.
- This will arm the area you have selected, the area light will illuminate.

DISARMING THE SYSTEM

(PRESS CLEAR AT START & THEN AT END)

- To disarm the system you must specify that you are entering an area by using the [OFF] key.
- To disarm Enter user code and press [OFF] key
- The area lights will extinguish.
- If areas are displayed after entering user code as above,
- Enter area number and press ENTER key.
- This will disarm the selected area.
- The area light will extinguish.
- Press next to display more areas and press ENTER key to disarm each area.

RESETTING A ALARM

- Enter user code and press ENTER key,
- (if the areas are displayed after entering user code as above, enter area number and press ENTER key).
- If the reset function is successful,
- The area light stops FLASHING and returns to the state it was in before the alarm.
- Display will now show: 'THERE ARE NO ALARMS IN THIS AREA'.

BYPASSING A ZONE OR SECTOR

'BEFORE COMMENCING,THE BOTTOM LINE OF DISPLAY MUST SHOW 'CODE'.

- Press MENU key then enter user code, then press ENTER key,
- Move to MENU OPTION #10 and press ENTER key.
- Enter sector number and press ENTER key or NEXT to update the list of inputs and display the remaining sectors
- When finished bypassing the required sectors press the ENTER key to return to MENU.

'SECTORS MUST BE DE-ISOLATED AFTER FAULT HAS BEEN RECTIFIED'

Always There®

Tips to help you prevent false alarms:

BEFORE LEAVING THE PROPERTY

Secure all windows and doors confine pets to designated rooms by keeping doors shut

AT NIGHT

Keep windows and doors shut in rooms which are being protected by sensors confine pets to designated rooms

ENSURE

Sensors are not obstructed by furniture or suspended objects eg. Festive/party decorations detectors are free of insects and cobwebs

TAKE CARE

Protect sensors when decorating or doing building work. If you go away ensure that your key holders know how to switch your alarm off

HOW TO CANCEL FALSE ALARMS

Your password/voice code if ADT needs to verify an alarm inform ADT Security of the dates you'll be away

Contact Us

131 005
www.adtsecurity.com.au
38 South Street,
Rydalmere NSW 2116

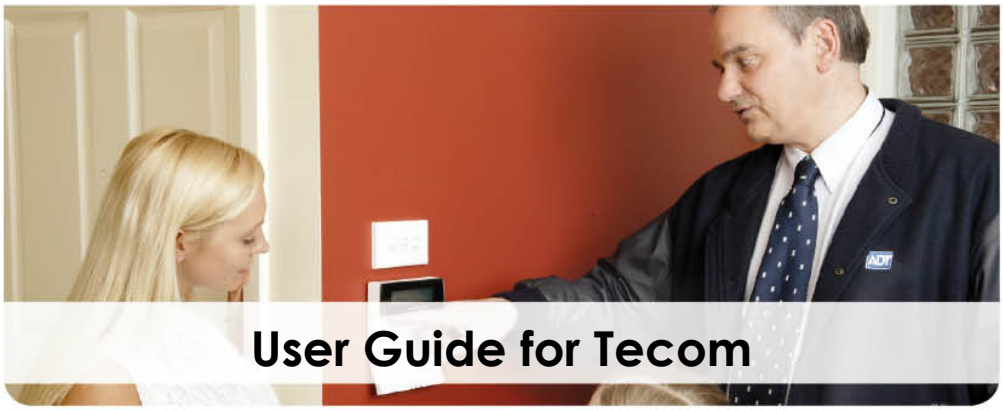

User Guide for Tecom

UNBYPASSING A ZONE OR SECTOR

- To de-isolate a sector press MENU key then STAR button, enter user code and press enter,
- Move to MENU OPTION #11 and press ENTER key.
- Enter sector number and press ENTER key or NEXT to update the list of inputs and display the remaining sectors
- When finished bypassing the required sectors press the ENTER key to return to MENU.

Tips to help you prevent false alarms:

BEFORE LEAVING THE PROPERTY

Secure all windows and doors confine pets to designated rooms by keeping doors shut

AT NIGHT

Keep windows and doors shut in rooms which are being protected by sensors confine pets to designated rooms

ENSURE

Sensors are not obstructed by furniture or suspended objects eg. Festive/party decorations detectors are free of insects and cobwebs

TAKE CARE

Protect sensors when decorating or doing building work. If you go away ensure that your key holders know how to switch your alarm off

HOW TO CANCEL FALSE ALARMS

Your password/voice code if ADT needs to verify an alarm inform ADT Security of the dates you'll be away

Always There®

Contact Us

131 005
www.adtsecurity.com.au
38 South Street,
Rydalmere NSW 2116